FORM PTO-1: (REV 10-2000)		ATTORNEY'S DOCKET NUMBER
'	RANSMITTAL LETTER TO THE UNITED STATES	KONIG-003
	DESIGNATED/ELECTED OFFICE (DO/EO/US)	U.S. APPLICATION NO (If known, see 37 CFR 1.5)
	CONCERNING A FILING UNDER 35 U.S.C. 371	09/830896
	ATIONAL APPLICATION NO. INTERNATIONAL FILING DATE 22 October 1999	PRIORITY DATE CLAIMED 3 November 1998
TITLE C	OF INVENTION Method for Adjusting the Fuel Co ture Containing Alcohol or Ether as Fuel a	ncentration of a Fuel and Water, Used
APPLICA	ANT(S) FOR DO/EO/US Dieter Meissner et al.	
Applican	t herewith submits to the United States Designated/Elected Office (DO/EO/US) the follows:	owing items and other information:
1. 🔽	This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.	
2.	This is a SECOND or SUBSEQUENT submission of items concerning a filing under	
3.	This is an express request to promptly begin national examination procedures (35 U.S.	3.C. 371(f)).
4. 🗓	The US has been elected by the expiration of 19 months from the priority date (PCT A	Article 31).
5. X	A copy of the International Application as filed (35 U.S.C. 371(c)(2))	
ł	a. is attached hereto (required only if not communicated by the Interna	itional Bureau).
l	 b.	aiving Office (PO/LIS)
6. X	An English language translation of the International Application as filed (35)	- · · · · · · · · · · · · · · · · · · ·
7. 🛚	Amendments to the claims of the International Application under PCT Article	
1	a. are attached hereto (required only if not communicated by the Intern	
	b. have been communicated by the International Bureau.	,
	c. have not been made; however, the time limit for making such amend	iments has NOT expired.
	d. A have not been made and will not be made.	
8.	An English language translation of the amendments to the claims under PCT	Article 19 (35 U.S.C. 371(c)(3)).
9. 🔀	An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).	
10	An English language translation of the annexes to the International Preliminar PCT Article 36 (35 U.S.C. 371(c)(5)).	ry Examination Report under
Items	11 to 16 below concern document(s) or information included:	
11.	An Information Disclosure Statement under 37 CFR 1.97 and 1.98.	
12.	An assignment document for recording. A separate cover sheet in compliance	e with 37 CFR 3.28 and 3.31 is included.
13.	A FIRST preliminary amendment.	
	A SECOND or SUBSEQUENT preliminary amendment.	
14.	A substitute specification.	
15.	A change of power of attorney and/or address letter.	
16. ZX	Other items or information:	
23.6.	a) One Sheet of Drawings	
	b) Express Mail Certification	
	c) Return Postcard	

U.S. APPLIATION OF ITE	8"30"896	INTERNATIONAL APPLICATION NO			ATTORNEY'S DOCK KONIG	
				CA	LCULATIONS	PTO USE ONLY
BASIC NATIONA Neither internation	The following fees are submitted: Neither international preliminary examination fee (37 CFR 1.482) nor international preliminary examination fee (37 CFR 1.482) nor international preliminary examination fee (37 CFR 1.482) nor international Search Report not prepared by the EPO or JPO		\$1000.00			
International p	oreliminary examination	fee (37 CFR 1.482) not paid to	\$860.00			
International p	reliminary examination	fee (37 CFR 1.482) not paid to USI	PTO but			
but all claims	did not satisfy provision	ns of PCT Article 33(1)-(4) · · · · ·	\$690.00			
International p and all claims	satisfied provisions of	PCT Article 33(1)-(4)	\$100.00		· · ·	
	ENTER APPR	OPRIATE BASIC FEE AM	1OUNT =	\$	860.00	
Surcharge of \$130 months from the	.00 for furnishing the o earliest claimed priority	ath or declaration later than 20 date (37 CFR 1.492(e)).	0 30	\$	-0-	
	NUMBER FILED	NUMBER EXTRA	RATE			
Total claims			X \$18.00	\$	-0-	
			X \$80.00	\$	-0-	
MULTIPLE DEPE				\$	270.00	
	<u>TOTA</u>	L OF ABOVE CALCULAT	rions =	<u>\$ 1</u>	,130.00	
Applicant cl are reduced b	aims small entity statu by 1/2.	s. See 37 CFR 1.27. The fees i	ndicated above	\$	-0-	
		SUBT	TOTAL =	\$ 1	.130.00	
Processing fee of smonths from the	\$130.00 for furnishing tearliest claimed priority	he English translation later than date (37 CFR 1.492(f)).	20 30 +	\$	-0-	
		TOTAL NATION	AL FEE =	\$ 1	,130.00	
Fee for recording accompanied by a	the enclosed assignmen in appropriate cover she	t (37 CFR 1.21(h)). The assignme	nt must be	\$	-0-	
		TOTAL FEES ENC	LOSED =	\$ 1	,130.00	
				Am	ount to be	\$
					refunded:	\$
		-			charged:	3
b. A Please ch A duplica	narge my Deposit Accou ate copy of this sheet is nmissioner is hereby au	nt No. <u>19-1218</u> in the a	amount of \$1,	130	ired or credit a	
SEND ALL CORRESP Ralph W. Selitto, P.O. Box Edison,	CONDENCE TO Selitto, Jr Behr & Kim 1477 NJ 08818-147	nted to restore the application to .	pending status.	Ol Re () ph 1	W. Selit	elittoh

Method for regulating the fuel concentration in a fuel mixture of a fuel cell which contains alcohol or ether as fuel and water, and fuel cell system

5 Description

10

15

20

25

30

35

relates method invention t.o The regulating the fuel concentration in a fuel mixture for a fuel cell which is formed by an alcohol or an ether system, and to a fuel cell fuel and water, containing at least one fuel cell, which can be operated with a fuel mixture consisting of an alcohol or an ether as fuel and water, and at least one mixing which is connected to in each case one controllable fuel inlet, and at least one fuel-mixture feedline, which connects the at least one mixing space to in each case the at least one fuel cell.

At the date of this application, fuel cell systems of the abovementioned type have already been known for over 30 years (cf. for example W. Vielstich; "Brennstoffelemente" [Fuel Elements] Verlag Chemie, Weinheim 1965, pages 73-93 and L. Oniciu; "Fuel Cells", Abacus-Press, Kent, 1976, pages 93-98). The alcohol, for example methanol, as fuel, mixed with water to form a fuel mixture, is fed to a fuel cell, where it is directly converted into electrical energy. Alcohol contents of between 1% by volume and 5% by volume in the fuel mixture have proven particularly advantageous for operation of a fuel cell of this type. One problem with the operation of fuel cells of this type is that of keeping the alcohol concentration of the fuel mixture as constant as possible. This applies equally to fuel cells which use alcohol and fuel cells which use ether as the fuel.

DE 197 01 560 Al has disclosed a fuel cell system in which a liquid fuel mixture comprising a fuel and a coolant is fed to the anode space of a fuel cell. DE 196 28 888 Cl discloses a fuel cell which can be operated, inter alia, with a fuel mixture of fuel and

15

20

25

30

35

water. In this case, the efficiency of the fuel cell is increased by an alternating operating pressure. DE 44 25 634 C1 has disclosed a method and a device for the metered supply of methanol and/or water from a reservoir, via a conveyor pipe, to a fuel cell system. In this case, a delivery pump is used to convey a constant mass flow rate from the reservoir into the conveyor line, and the differential pressure between conveyor line and fuel cell system is set to a predetermined value with the aid of a differential pressure regulator, so that the quantity of methanol and/or water supplied can be set, for example, varying the opening and closing times of a solenoid valve. The abovementioned prior art fails to disclose either a method or a device for regulating the fuel concentration in the fuel mixture.

DE 35 08 153 has disclosed the regulation of the concentration of the fuel within a fuel mixture using a fuel cell which is operating in idling mode. This document exploits the fact that the idling potential of a fuel cell is dependent on the fuel concentration. However, this type of regulation is highly complex and therefore very expensive.

It is now an object of the present invention to provide a method of the type described in the introduction which is simpler than the prior art and at the same time is effective, and to provide a fuel cell system which is suitable for carrying out this method.

With regard to a method for regulating the fuel concentration in a fuel mixture of a fuel cell which contains an alcohol or ether and water, this object is achieved by the fact that the fuel is fed via a controllable fuel inlet to a mixing space, from where the fuel mixture is fed, via a fuel-mixture feedline, to the fuel cell via a membrane which is arranged downstream of the fuel inlet, as seen in the direction of flow, delimits a measurement chamber and is selectively permeable to water and the fuel, a liquid or gaseous measurement mixture with a fuel

15

20

25

30

35

concentration of less than 1% by volume or more than 5% by volume, depending on the quantity of fuel which permeates into the measurement chamber from the fuel produced unit time, being per measurement chamber, whereupon the fuel concentration in the measurement mixture is determined and the fuel function of the controlled as а inlet is concentration in the measurement mixture.

Therefore, the regulation is achieved by the fact that it is not directly the fuel concentration in the fuel mixture which is determined, but rather the fuel concentration in a measurement mixture in which the fuel concentration is within a range which can be measured with sufficient accuracy and speed using known sensors. The fuel concentration in the measurement mixture is directly dependent on the fuel concentration in the fuel mixture, so that it can be controlled by measuring the fuel content in the measurement mixture.

The method according to the invention can be carried out in such a way that, to produce the measurement mixture in the measurement chamber, carrier liquid or a carrier gas is used to dilute and/or remove the permeated fuel. The permeated fuel can also be consumed at electrodes in the measurement chamber, so that it is not imperative that the fuel be removed by the carrier liquid or the carrier gas. The specified fuel concentrations can also be achieved even without a carrier liquid or a carrier gas, by means of suitable membranes: for example, the membrane may be more permeable to the fuel than to water by more than one order of magnitude, so that a measurement mixture with a fuel concentration of less than 1% by volume even down to the ppm range can be formed in measurement chamber from the permeated fuel and the permeated water. Conversely, if the permeability of the membrane is higher for water than for the fuel, it is possible to form measurement mixtures in which the fuel concentration is over 5, preferably over 10% by volume. Membranes which are suitable for this purpose are known

15

20

25

30

35

(cf. for example H. Strahtmann; "Membranes and Membrane Separation processes", B. Elvers, S. Hawkins, G. Schulz (Ed.); "Ullmanns Encyclopedia of Industrial Chemistry", Vol. A. 16. VCH, Weinheim, 1990, pages 187-263).

The method according to the invention may also be implemented in such a way that the fuel concentration of the measurement mixture, in the case of values above 10 or 5% by volume, is determined by means of a liquid sensor.

The method according to the invention may also be carried out in such a way that the fuel concentration of the measurement mixture is determined by means of density or viscosity measurements.

The method according to the invention may also way that out such a in carried concentration of the measurement mixture is determined by means of optical methods, for example by means of infrared absorption. Optical sensors which are suitable for this purpose, in particular for assessing the CH vibrations of the fuel, are also known (cf. for example A. Brittain et al. (Ed.) "Optically Based Methods for PIE Proceedings Vol. Process Analysis", S. Somerset, NJ, USA, 1992).

The method according to the invention may also the way that in such a out carried be concentration of the measurement mixture, in the case of values below 1.0 or 0.1% by volume, is determined by means of a gas sensor. A gas sensor of this type has a semiconductor element which changes its electrical properties as a function of the concentration of the fuel. A gas sensor of this type and its use in a measurement chamber delimited by a silicone membrane is likewise known in connection with bioreactors (cf. FMC-Handbuch der Biotechnologie [FMC Biotechnology Manual] Kempe GmbH, Berlin). Furthermore, it is in this case possible to carry out the determination by recording the conductivity and by infrared absorption.

30

In a fuel cell system of the type described in the introduction, the abovementioned object is achieved by the fact that the fuel cell system has at least one measurement probe, which is arranged downstream of the fuel inlet, as seen in the direction of flow of the fuel mixture, and comprises

- a) a measurement chamber,
- a membrane which delimits the measurement chamber, b) with the fuel mixture, contact selectively permeable to the fuel and/or water and 10 is used to produce a liquid or gaseous measurement mixture with a fuel concentration of less than 1% by volume or more than 5% by volume depending on the quantity of fuel which has permeated into the measurement chamber from the fuel mixture per unit 15 time, and
 - c) a sensor for determining the fuel concentration in the measurement mixture,

and that the fuel cell system has means for controlling 20 the fuel inlet as a function of the fuel concentration in the measurement mixture.

The invention furthermore provides for the sensor to be a gas, liquid, infrared absorption, density measurement, optical or conductivity measurement sensor.

In the text which follows, an embodiment or a configuration is described, by way of example, for the methods according to the invention and the fuel cell systems according to the invention in connection with methanol combustion. In the drawing:

- Fig. 1 diagrammatically depicts the structure of a fuel cell system which uses methanol as fuel, and
- 35 Fig. 2 diagrammatically depicts an enlarged excerpt from the arrangement shown in Fig. 1, with a measurement probe coupled to a fuel-mixture feedline.

15

20

25

30

35

The fuel cell system shown in Fig. 1, which uses methanol as fuel, comprises a fuel cell 1 with a fuel chamber 2 and a reactant chamber 3. The fuel mixture, which consists of methanol and water, is fed to the fuel chamber 2 via the fuel-mixture feedline 4, the methanol concentration in the fuel mixture amounting to approximately 4% by volume. The reactant chamber 3 is supplied with air via a reactant feedline. The exhaust gas, which is a water/air mixture, is discharged from the reactant chamber 3 via the exhaust-gas line 6.

The fuel mixture, in which the methanol level has been reduced by the amount consumed, is discharged from the fuel chamber 2 via the residual fuel discharge line 7 and is passed to an intermediate store 8. A recycling pump 9 is connected to the intermediate store 8, via which pump the fuel mixture of reduced methanol content is pumped into the fuel-mixture feedline 4 and therefore to the fuel chamber 2. The fuel mixture is therefore circulated.

To enable the fuel mixture which enters the requisite methanol have the 2 to chamber fuel concentration, methanol is pumped out of a methanol store 10, via a methanol pump 11, into a mixing space 12, where it is mixed with the fuel mixture of reduced methanol content from the intermediate store 8. mixing space 12 is symbolically represented in enlarged form in Fig. 1 but may actually also simply be a part of the fuel-mixture feedline 4. The pumping capacity of the methanol pump 11 is controllable.

To be able to ensure that the methanol content of the fuel mixture which enters the fuel chamber 3 is as constant as possible, the methanol concentration is regulated. To do this, a parameter which is directly dependent on the methanol concentration in the fuel mixture is measured. The area surrounded by a dashed circle in Fig. 1 is shown on an enlarged scale in Fig. 2. Fig. 2 shows a measurement probe 13 which is fitted to the fuel-mixture feedline 4. The measurement probe

15

20

13 has a membrane 14 which is in direct contact with the fuel mixture flowing past. The membrane 14 is selectively permeable to water and methanol, in such a manner that a measurement mixture which consists of water and methanol and has a methanol content in the ppm range is formed in the measurement chamber 16 which is delimited by the walls 15 of the measurement probe 13 and of the membrane 14. In the measurement chamber 16 there is a methanol sensor 17 which is highly effective in this concentration range. The measured variable which is generated by the methanol sensor 17 as a function of the methanol concentration in the measurement mixture is transmitted via the measurement line 18 to a control unit 19 (Fig. 1) which therefore controls the methanol pump 11 as a function of the concentration in the measurement mixture. methanol Since the methanol concentration in the measurement methanol directly dependent the on is mixture concentration in the fuel mixture in the fuel feedline 4 at the location of the measurement probe 13, this control arrangement can be used to maintain substantially constant methanol concentration in the fuel mixture.

List of reference numerals

Fuel	cell

- 2 Fuel chamber
- 3 Reactant chamber
- 4 Fuel-mixture feedline
- 5 Reactant feedline
- 6 Exhaust-gas line
- 7 Residual fuel discharge line
- 8 Intermediate store
- 9 Recycling pump
- 10 Methanol store
- 11 Methanol pump
- 12 Mixing space
- 13 Measurement probe
- 14 Membrane
- 15 Wall
- 16 Measurement chamber
- 17 Methanol sensor
- 18 Measurement line
- 19 Control unit

Claims

- Method for regulating the fuel concentration in 1. a fuel mixture for a fuel cell which is formed by an fuel and water, ether the an as alcohol orfed via fuel is characterized in that the controllable fuel inlet (11) to a mixing space (12), from where the fuel mixture is fed, via a fuel-mixture feedline (4), to the fuel cell (1) via a membrane (14) which is arranged downstream of the fuel inlet (11), as 10 seen in the direction of flow, delimits a measurement chamber (16) and is selectively permeable to water and the fuel, a liquid or gaseous measurement mixture with a fuel concentration of less than 1% by volume or more than 5% by volume, depending on the quantity of fuel 15 which permeates into the measurement chamber (16) from the fuel mixture per unit time, being produced in the whereupon the (16).measurement chamber concentration in the measurement mixture is determined and the fuel inlet (11) is controlled as a function of 20 the fuel concentration in the measurement mixture.
 - 2. Method according to Claim 1, characterized in that a liquid or gaseous measurement mixture with a fuel concentration of less than 0.1% by volume depending on the quantity of fuel which has permeated into the measurement chamber (16) from the fuel mixture per unit time is produced in the measurement chamber (16).
- 3. Method according to Claim 1, characterized in that a liquid or gaseous measurement mixture with a fuel concentration of more than 10% by volume which is dependent on the quantity of fuel which has permeated into the measurement chamber (16) from the fuel mixture per unit time is produced in the measurement chamber 35 (16).
 - 4. Method according to one of the preceding claims, characterized in that to produce the measurement mixture in the measurement chamber (16) a


20


25

carrier liquid or a carrier gas is used to dilute and/or remove the permeated fuel.

- 5. Method according to one of the preceding claims, characterized in that the fuel concentration of the measurement mixture, in the case of values above 10 or 5% by volume, is determined by means of a liquid sensor.
- 6. Method according to Claim 5, characterized in that the fuel concentration of the measurement mixture is determined by means of density or viscosity measurements.
- 7. Method according to Claim 5, characterized in that the fuel concentration of the measurement mixture is determined by means of optical methods.
- 15 8. Method according to Claim 7, characterized in that the fuel concentration of the measurement mixture is determined by means of infrared absorption.
 - 9. Method according to one of Claims 1 to 4, characterized in that the fuel concentration of the measurement mixture, in the case of values below 1.0 or 0.1% by volume, is determined by means of a gas sensor.
 - 10. Method according to Claim 9, characterized in that the fuel concentration of the measurement mixture is determined by means of optical methods or by determining the conductivity.
 - 11. Method according to Claim 9, characterized in that the fuel concentration of the measurement mixture is determined by means of infrared absorption.
- 12. Fuel cell system, containing at least one fuel cell (1), which can be operated with a fuel mixture consisting of an alcohol or an ether as fuel and water, and at least one mixing space (12), which is connected to in each case one controllable fuel inlet (14), and at least one fuel-mixture feedline (4), which connects the at least one mixing space (12) to in each case the at least one fuel cell (1), characterized in that the fuel cell system has at least one measurement probe (13), which is arranged downstream of the fuel inlet

- (11), as seen in the direction of flow of the fuel mixture, and comprises
- a) a measurement chamber (16),
- b) a membrane (14) which delimits the measurement chamber (16), is in contact with the fuel mixture, is selectively permeable to the fuel and/or water and is used to produce a liquid or gaseous measurement mixture with a fuel concentration of less than 1% by volume or more than 5% by volume depending on the quantity of fuel which has permeated into the measurement chamber (16) from the fuel mixture per unit time, and
 - c) a sensor (17) for determining the fuel concentration in the measurement mixture,
- and in that the fuel cell system has means (19) for controlling the fuel inlet (11) as a function of the fuel concentration in the measurement mixture.
- 13. Fuel cell system according to Claim 12, characterized in that a gas, liquid, infrared absorption, density measurement, optical or conductivity measurement sensor is provided as the sensor (17).

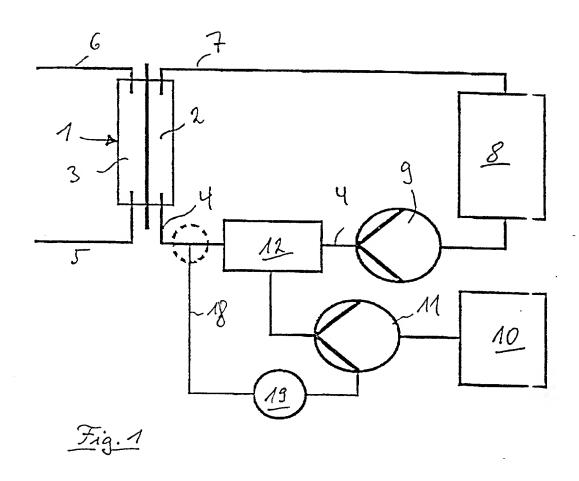

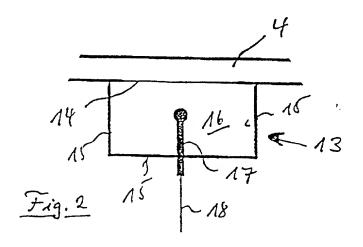

lease type a plus sign (+) inside Under the Paperwork Re a valid OMB control numb	duction Act of 1995, no perso	Palent and Tradem	ark Office: U.S.	hrough 9/30/00. (DEPARTMENT O	FCOMMERCE
		Attorney Dock	et Number	KONIG-	003
DECLARATION	FOR UTILITY OF SIGN	First Named In	ventor		Meissne
	PPLICATION	c	OMPLETE I	F KNOWN	
•	R 1.63)	Application Nu		/	
	_	Filing Date			
Submitted OR	☐ Declaration Submitted after Initial	al Group Art Unit			
with Initial Filing	Filing (surcharge (37 CFR 1.16 (e)) reguired)	Examiner Nam	ie		
My residence, post office :	olor, I haraby declare that:		-	fine and into the	adaa (X - huad
names are listed below) of	first and sole inventor (if only if the subject matter which is o	dalmed and for which a n	great is spuckt	on the invention e	ntitled:
the specification of which is attached herew OR Was filed on (MAWD)	Į mae	as Unit	ad States Applic	ation Number or I	PCT International
Application Number PCT	DE99/03384] and wa	as amended on (MM/DD/	m		(if applicable).
amended by any amendme	aviewed and understand the c int apacifically referred to abo disclose information which is n	46'	•		esims. es
I hereby claim foreign priors certificate, or 365(a) of any America, isted below and ha or of any PCT international a	PCT international application we also identified below, by o	n which designated at le trecking the box, any lore	isst one country eign application	other than the t for patent or inve	Inited States of
Prior Foreign Application Number(s)	Country	Foreign Filling Date (MM/DD/YYYY)	Priority Not Claimed		Ppy Attached? NO
198 50 720.8	Œ	11/03/1998	0000	0000	0000
	ation numbers are listed on a				elo:
I hereby claim the benefit of Application Number	inder 35 U.S.C. 119(a) of any	United States provisions (MIM/DD/YYYY)	al application(s)	fieled below	
Managar Hallon	rang data	Transaction and 1 111/	num supp	tional provisions bers are listed o lemental priority /SB/02B attach	n a / data sheet

[Page 1 of 3]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Palents, Washington, DC 20231.

Uni	gn (-) inside this box der the Paperwork Reducti alid OMB control number.	+ on Act of 1995.	no persons a	Palent and '	Frademark Off	ica: U.S. Di	ough 9/30/00. OM EPARTMENT OF (COMMERCE
DECL	ARATION -	– Utilit	y or [Desig	n Pate	nt A	pplicati	on_
United States of Am United States of PCT Information which is	mefit under 35 U.S.C. 120 erica, listed below and, in International application in material to patentability as CT international films date	sofar as the sub n the manner pro s defined in 37 C	ijed matter ovided by the SFR 1.56 wh	of each of II e first paragri	ne claims of th auch of 35 U.S.	ris applicali C. 112 I ac	on is not disclose knowledge the du	d in the prior ry to disclose
	erent Application of Number				iling Date D/YYY)	F	arent Patent (if applica	
	or PCT international application							
; a named inventor, id Trademark Office	hereby appoint the follow connected therewith:	ving registered po Customer Num OR Registered pra	iber 07	815_		_ `	ansact all busines	; in the Paler
N	ame	Regis	mber	lar.reyregrau	Nag	_	0	1815
							_	TRADEMARK
		}					T GORA	KAR TANAH TANAT MANA
Additional registe	red practitioner(s) named	on Eugplemenia	Registered	Practitioner 1	nformation sh	cet PTO/SE	VO2C attached he	reta.
rect all correspon	342	mer Number Code Label	0181	5	OR	Con	espondence ad	dress belov
lame								
ddress								
Address								
ity				State		ZIP		
slicyed to be true; unishable by line o	t all statements made her and further that these size of imprisonment, or both, then issued thereon.	dements were n	knowledge a	ie knowledge	that willful fa	isa stalemi	ents and the like	so made an
lame of Sole o	r First Inventor:			A petiti	on has been	filed for the	nis unsigned inv	entor
Given I	lame (first and middle l	lif anyl)			Famil	y Name n	r Sumame	
Dieter				MEISS	<u>NER</u>			25.4.
nventor's Signature		uc 1	<u>C.</u>				Date	2007
Residence: City	Linz	State	AT	Country			Citizanship	DE
ast Office Addres	Julius-Raa	b-Straße	10					
Post Office Addres	a A-4040 Lin	z				,		
	1	}]	İ		Countr		
Cily	State		ZIP	ــــــــــــــــــــــــــــــــــــــ		Count	<u> </u>	

	DECLARATION				ADDITIONAL INVENTOR(S) Supplemental Sheet Page _3 of 3.				
Name of Addition	nal Joint Inventor, if a	ıy:		A petitic	n has been file	ed for this	s unsigned in	vento	
Given Na	me (first and middle [if any	1)			Family Ne	me or S	umamė		
Hans-Fried	rich /	21		DETJEN					
Signature Signature	1	Z					Date	3.2	
Residence: City	Linnich 12	State	DE	Country			Citizenship		
Post Office Address	ChJMatzer	ath-5	traße	4					
Post Office Address	D-52441 Linni	.ch			 -j				
City		State		ZIP		Country			
Name of Additional Joint Inventor, if any:			A petition has been filed for this unsigned inventor						
Given Na	ne (first and middle [if any])			Family Na	me or Su	mame		
Jürgen				MERGE	L				
inventor's Signature	}	le		,			In a	1	
Residence: City	Jülich A	State	DE	Country			Citizanship		
Post Office Address	Jan-von-Werth	-Stra	3e 96						
Post Office Address	D-52 <u>428</u> Jülic	h							
City		State		ZIP		Countr	y		
Name of Addition	al Joint Inventor, if an	y:	1	A petition	has been file	d for this	unsigned in	entor	
Given Nar	ne (first and middle [if eny])			Family Nar	ne or Su	mame		
			L						
inventor's Signature							Date		
Residence: City		State		Country			Citizenship		
Post Office Address									
Post Office Address					. ——				
CID		State		ZIP	i	Cou	intry		

+